

Description

Capacities: (Emax)
10,20,25,30t

Rated output:
2.0mV/V
Digital:1,000,000d

Grade/Accuracy:
C3 OIML R60

Material of elastomer:
Alloy steel or stainless steel



Execution standard:
GB/T 7551-2008 Certificate
(eqv OIML R60)
Combined error: 0.015%

Sealed to IEC 529:
Protection grade: IP67 or IP68.
Protection against total immersion
in water for 30 minutes at a pressure
corresponding to a 1 m head of water.




Dimensions

(In mm, 1mm=0.03937inches)

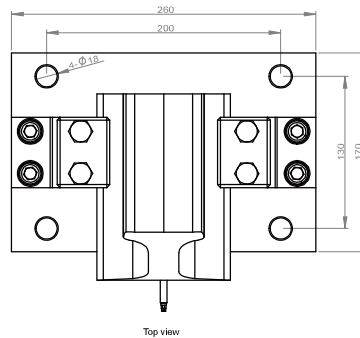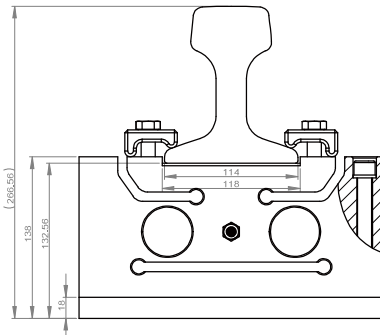

Circuit Diagram

Electrical Termination
4 Cores cable standard lengths:
$\leq 22\text{klb}$:5m, $\geq 75\text{klb}$:12m
Cable Diameter: $\Phi 6$
Connection:
Refer to the following drawing:

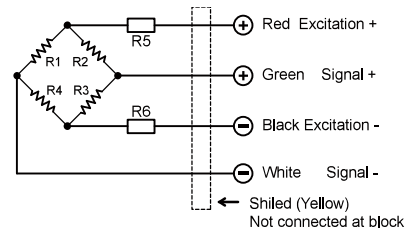

Note:
6 Cores cable is optional.
Do not change the length of cable, or lese,
it will effect the sensitivity of load cell.

Specification

Item/Parameter	C3	Unit
Rated load(Emax):	10,20,25,30	t
Maximal numbers of loadcell verification intervals (Nc):	3000	d
Minimum number of loadcell verification intervals (Vmin)	0.01	% of rated load
Rated output (Cn):	2.0 ± 0.1%	mV/V
*Combined error:	0.015	% of rated output
Temperature effect on sensitivity (TKc):	0.0012	% of rated output/°C
Temperature effect on zero balance (TK0):	0.0008	% of rated output/°C
Zero balance:	1.0	% of rated output
Input resistance (RiC):	775 ±10	Ω(Ohms)
Output resistance (Ro):	702 ±2	Ω(Ohms)
Insulation resistance:	≥5000	MΩ(Mega-Ohms)
Safe overload:	150%	% of rated capacity
Operating temperature range:	-20~+70(180 Optional)	°C
Recommend excitation:	5~18	V(DC or AC)
Maximum excitation:	24	V(DC or AC)
Material of elastomer:	Alloy Steel / Stainless Steel	
Protection class:	IP67/IP68	

Copyright

Modifications reserved
All details describe our products in general
from only.

They are not to be understood as express warranty and do
not constitute liability whatsoever.

The company reserves the right to make amendments to
this datasheet information without prior notice.

No part of this datasheet, including the texts, photographs,
may be reproduced or transmitted without the express
written permission of Ningbo Maken Electric Co.,Ltd.

MAKEN
MAKEN ELECTRIC

Ningbo Maken Electric Co.,Ltd.
Add: 28 Moju Road,WangAi industry park,
Beilun,Ningbo City, China ZIP:315800
Tel: +86-574-8680 6565
Fax:+86-574-8609 0607
E-mail: sales@makenie.com
maken.bowey@hotmail.com
http://www.makenie.com www.maken.biz

The data for deviation of synthesis error,TK0,TKc are typid values. The sum of these
data meets the requirements according to OIML R60